




# DATA SHEET MATRIX F22



## Recommended daily usage

Up to 150 letters / day




## TECHNICAL DATA AND SPECIFICATIONS MATRIX F22

<b>Franking speed / Letter thickness</b>	25 letters per minute / Letter thickness up to 10 mm.
<b>User interface</b>	Touchscreen monochrom display, 24 programmable OneTouch functions (quick access to postal products).
<b>Scales / Tariff calculation</b>	Online tariff service and downloads, scales 2 kg / 5 kg integrated, space-saving acrylic scale stand, separate interface for 30 kg scales (option), stack weighing mode or single item weighing mode (2 different weighing modes), tariff module with quick access to other postal products.
<b>Advertising</b>	Ink-jet printing technology with HQ high quality printing mode (600 dpi), linking of ad-slogans to accounts, 3 pre-programmed standard slogans (messages), 5 customer-specific ad-slogans (option), 3 self-programmable text messages additional to ad-slogans.
<b>Additional prints</b>	PPI (Printed Postage Impression), indicia print with or without flexible date, 1D-Barcode for postal services, incoming mail stamp function with date and time (without postage).
<b>Accounts</b>	10 password protected accounts, expandable up to 50 (option), report print-outs, 1 password protected admin mode.
<b>Interfaces</b>	IP communication technology (LAN, DHCP, Proxy), Ethernet RJ45 network connection, WLAN via WLAN-Bridge (option).
<b>SmartShop</b>	Integrated ordering of consumables online via Touchscreen (option).
<b>Comfort functions</b>	High value warning, automatic date and time change, multi-level energy saving modes with Soft-Off.
<b>Licences / Certificates</b>	FIPS 140-2 Level 3, IPMAR, CE, BSI-Grundschutz.
<b>Noise level</b>	Quiet in operation: LPA 1 m: 53 dB(A).
<b>Power consumption</b>	240 V / 50 Hz, off: 0.44 W, ready to frank: 5.5 W, in Operation: 15 W.



### Envelope format specification (mm)

Envelope dimensions:	height:	min:	95 mm
	width:	min:	143 mm
	thickness:	min:	0.1 mm
		max:	10 mm
Processible formats (DIN):		min:	C6 (162 mm x 114 mm)

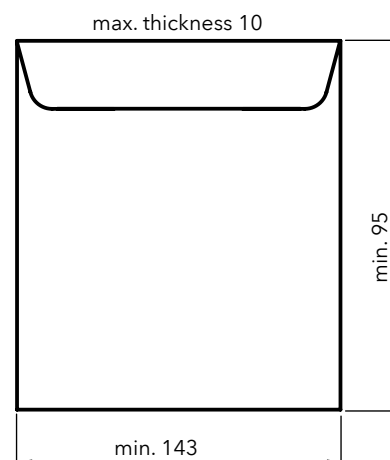

### Dimensions (mm) and weight

Weight 4.3 kg (net)

